



Apparecchio stagno LED o con attacco G13 per soli tubi LED con alimentazione diretta 220/240V, monolampada o bilampada, applicabile a parete o soffitto. Struttura in ABS grigio e diffusore in policarbonato, opale per la versione con LED integrato, trasparente e rigato internamente per la versione con attacco G13. Protezione IP65 che consente l'installazione in ambienti esterni, umidi e polverosi. Alimentatore integrato. La versione con attacco G13 è predisposta con il cablaggio universale, la versione con LED integrato è disponibile con gradazione 4000K. Disponibili giunti certificati IP68 per la realizzazione delle connessioni elettriche con barriera anticondensa.



Damp-proof fitting equipped with LED boards or with G13 lamp holder for LED tubes only, at 220/240V constant current. Single or twin-tube, for wall or ceiling installation. Consists of a grey ABS body with a polycarbonate diffuser, opal for LED versions or clear internally splined for G13 versions. Its IP65 protection rating makes it suitable for outdoor installations and in damp and dusty environments. On board driver. G13 version is ready with universal wiring, LED version available in gradation 4000K. IP68 linear connectors for moisture protection and anti-condensation linear joints are available.

DINARO LED

DINARO LED





Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
DIN102	4000K	2500	22W	1272 x 66 x 73
DIN103	4000K	3700	32W	1572 x 66 x 73
DIN105	4000K	5000	44W	1272 x 102 x 73
DIN106	4000K	7400	64W	1572 x 102 x 73

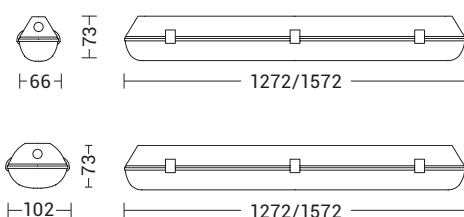

DINARO T8 - LED



Codice Code	G13	Potenza Wattage	Dimensioni mm Dimensions mm
DIN008	G13	1x18W max	1270 x 68 x 84
DIN009	G13	1x24W max	1570 x 68 x 84
DIN011	G13	2x18W max	1270 x 104 x 84
DIN012	G13	2x24W max	1570 x 104 x 84

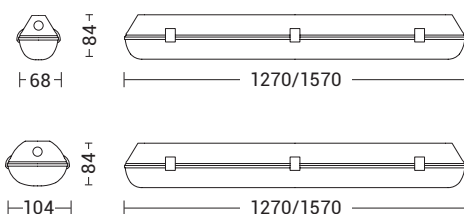

Finiture Finishes



Grigio Grey

Accessori Accessories



connessione IP68
IP68 connection