


Immergibile -5mt.
Submersible - 5mt.



SWITCH

Faretto LED ad incasso 24V per esterno a tenuta stagna IP68 in acciaio INOX anticorrosione (AISI 316), immersibile fino a 5 metri. Cassaforma in dotazione. Diffusore in vetro temperato ad alto spessore. Alimentatore LED da ordinare come accessorio e da installare in remoto. Disponibile in due temperature colore, 3000K e 4000K. Disponibili giunti IP68 per connessioni elettriche sicure, durevoli e con barriera anticondensa.

IP68 outdoor 24V LED floodlight luminaire, damp-proof and anti-corrosion (AISI 316) stainless steel body, up to 5 meters immersible. Recessed box included. Thick tempered glass diffuser. Remote LED driver to be ordered separately as accessory. Available in two gradations, 3000K and 4000K. IP68 linear connectors for moisture protection and anticondensation linear joints are available.


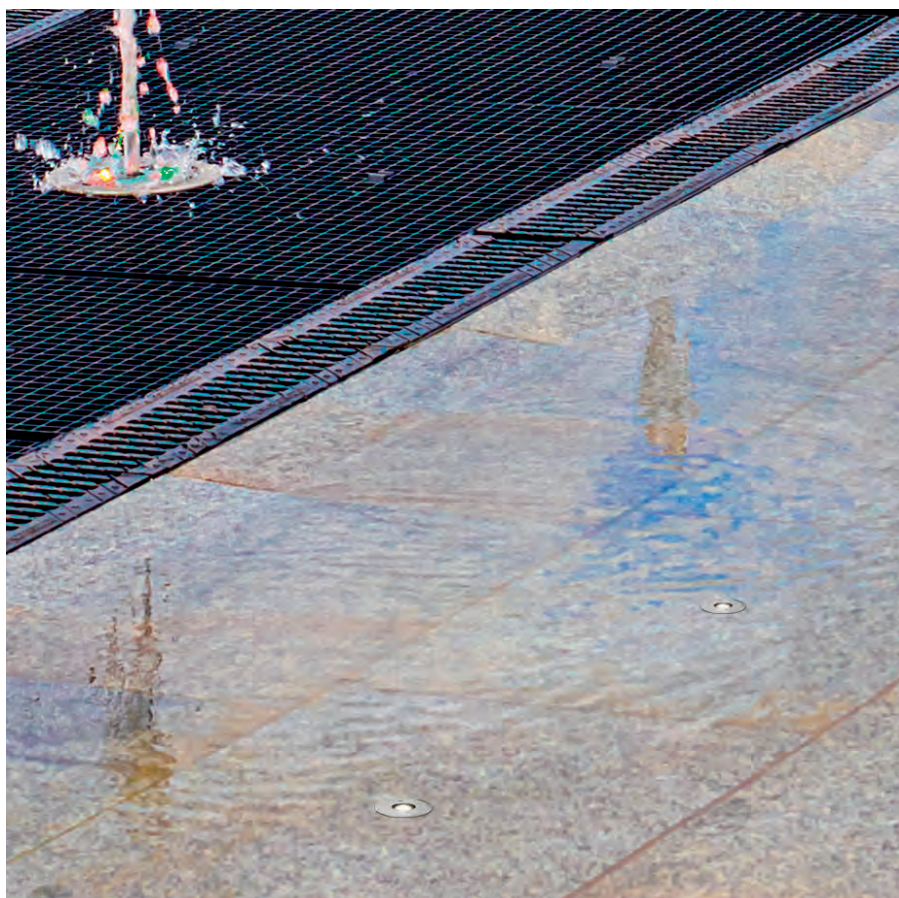


Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
SWT001	3000K	310	3W	Ø55 x 108
SWT002	4000K	330	3W	Ø55 x 108

 calpestabile max Kg 1000
walk over max Kg 1000

 immersibile fino a 5 mt
up to 5 mt immersible

 cassaforma inclusa
recessed box included




Finiture Finishes



Acciaio AISI316 Stainless steel AISI316

Accessori Accessories



TS.301
alimentatore LED
LED driver

p.433



connessione
IP68
connection

p.945

Altre applicazioni Other applications



Terra/
Proiettori
Bollard/
Floodlight:
SWITCH

p.851



SWITCH

Proiettore LED 24V orientabile per esterno a tenuta stagna IP68 in acciaio INOX anticorrosione (AISI316), immersibile fino a 5 metri.

Applicabile a terra con apposito picchetto da ordinare separatamente.

Diffusore in vetro temperato ad alto spessore. Disponibile in due temperature colore, 3000K e 4000K.

Alimentatore LED da ordinare separatamente e da installare in remoto. Disponibili giunti certificati IP68 per la realizzazione delle connessioni elettriche, sicure, durevoli e con barriera anticorrosione.

IP68 outdoor 24V LED adjustable floodlight luminaire, damp proof and anti-corrosion (AISI316) stainless steel body, up to 5 meters immersible.

Suitable for floor mounting to be ordered separately. Thick tempered glass diffuser. Available in two gradations, 3000K and 4000K.

Remote LED driver to be ordered separately as accessory.


IP68 linear connectors for moisture protection and anticorrosion linear joints are available.




Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
SWT003	3000K	310	3W	Ø55 x 48 x 66
SWT004	4000K	330	3W	Ø55 x 48 x 66

240°

immersibile fino a 5 mt
up to 5 mt immersible



INCASSI ESTERNI
OUTDOOR RECESSED




Finiture Finishes



Acciaio AISI316 Stainless steel AISI316

Accessori Accessories



TS.301
alimentatore
LED
LED driver
p.433



connessione
IP68
IP68
connection
p.945



MT.SWT013
picchetto in
alluminio
aluminium
spike



Altre applicazioni
Other applications

Incassi
Recessed
SWITCH
p.753